




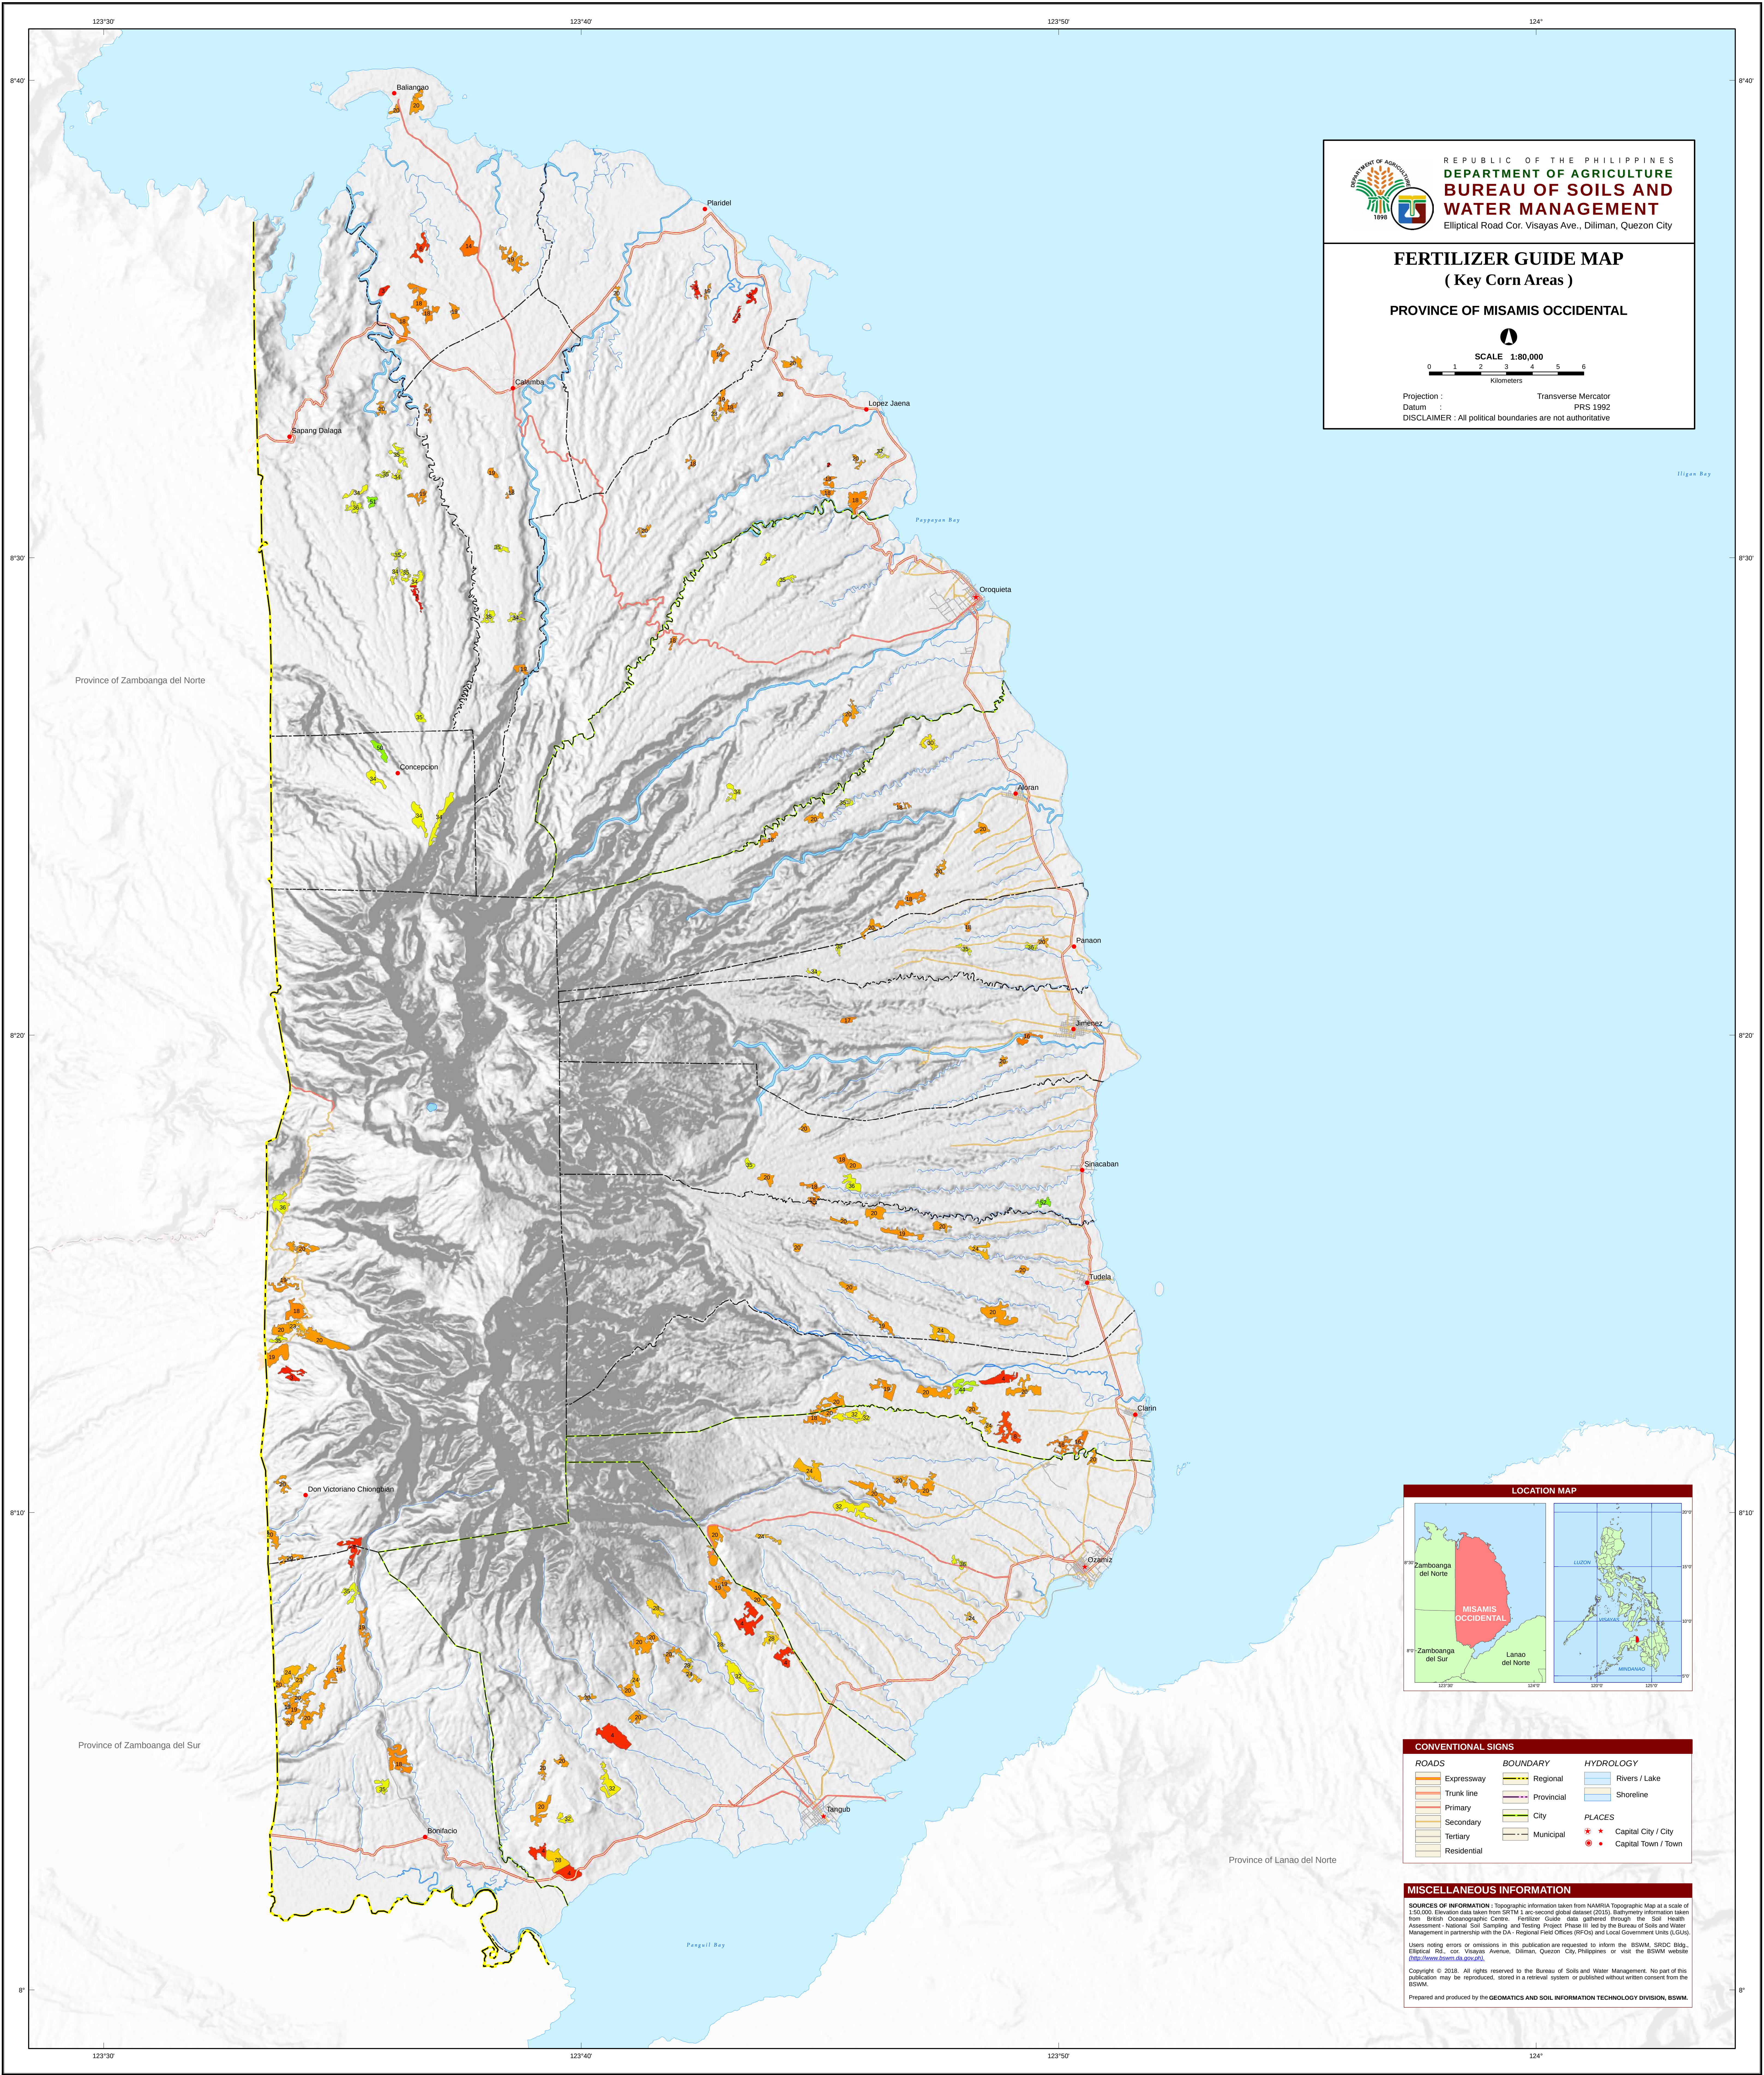


REPUBLIC OF THE PHILIPPINES
DEPARTMENT OF AGRICULTURE
**BUREAU OF SOILS AND
WATER MANAGEMENT**
Elliptical Road Cor. Visayas Ave., Diliman, Quezon City

FERTILIZER GUIDE MAP
(Key Corn Areas)

PROVINCE OF MISAMIS OCCIDENTAL




SCALE 1:80,000



0 1 2 3 4 5 6
Kilometers

Projection : Transverse Mercator
Datum : PRS 1992
DISCLAIMER : All political boundaries are not authoritative

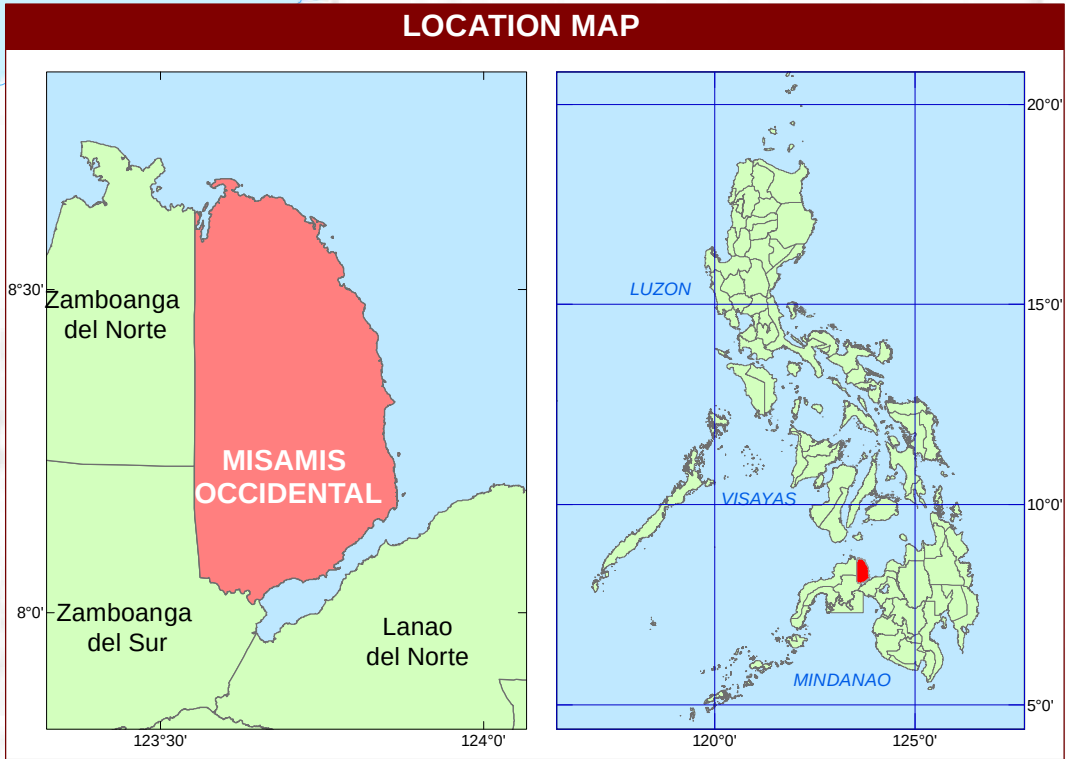

CONVENTIONAL SIGNS		
ROADS	BOUNDARY	HYDROLOGY
Expressway	Regional	Rivers / Lake
Trunk line	Provincial	Shoreline
Primary	City	PLACES
Secondary	Municipal	Capital City / City
Tertiary		Capital Town / Town
Residential		

MISCELLANEOUS INFORMATION

SOURCES OF INFORMATION : Topographic information taken from NAMRIA Topographic Map at a scale of 1:50,000. Elevation data taken from SRTM 1 arc-second global dataset (2013). Bathymetry information taken from British Oceanographic Centre - Fertilizer Guide data gathered through the Soil Health Assessment - National Soil Sampling and Testing Project Phase III led by the Bureau of Soils and Water Management in partnership with the DA - Regional Field Offices (RFOs) and Local Government Units (LGUs).

Users noting errors or omissions in this publication are requested to inform the BSWM, SRDC Bldg., Elliptical Rd., cor. Visayas Avenue, Diliman, Quezon City, Philippines or visit the BSWM website (<http://www.bswm.da.gov.ph/>).

Copyright © 2018. All rights reserved to the Bureau of Soils and Water Management. No part of this publication may be reproduced, stored in a retrieval system or published without written consent from the BSWM.

Prepared and produced by the GEOMATICS AND SOIL INFORMATION TECHNOLOGY DIVISION, BSWM.

Mapping Symbol	Description	All fertilizer recommendation options are recommended to apply additional 10-20 bags Organic Fertilizer per hectare														AREA						
		HYBRID CORN							OPEN-POLLINATED VARIETIES (OPV)													
		WET SEASON							WET SEASON							DRY SEASON						
		N-P-K	N	P ₂ O ₅	K ₂ O	Recommended Fertilizer Rate (bags/hectare)	Nutrient	N	P ₂ O ₅	K ₂ O	Recommended Fertilizer Rate (bags/hectare)	Nutrient	N	P ₂ O ₅	K ₂ O	Recommended Fertilizer Rate (bags/hectare)	Nutrient	N	P ₂ O ₅	K ₂ O	Recommended Fertilizer Rate (bags/hectare)	ha
2	L-L-ML	120	60	45	"Complete" Option: (1st Application): 6.5 (14-14-14); 0.75 (46-0-0); 1.75 (0-18-0); (2nd Application): 2.75 (46-0-0); "AmmoPhos" Option: (1st Application): 6 (16-20-0); 0.5 (46-0-0); 1.5 (0-60-0); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 6.75 (0-18-0); 1.5 (0-0-60); (2nd Application): 2.75 (46-0-0);	120	60	45	"Complete" Option: (1-time Application): 6.5 (14-14-14); 3.25 (46-0-0); 1.75 (0-18-0); "AmmoPhos" Option: (1-time Application): 6 (16-20-0); 3.25 (46-0-0); 1.5 (0-60-0); Single Element Option: (1-time Application): 5.25 (46-0-0); 6.75 (0-18-0); 1.5 (0-60-0);	80	60	45	"Complete" Option: (1st Application): 5.75 (14-14-14); 2.25 (0-18-0); 0.25 (0-0-60); (2nd Application): 1.75 (46-0-0); "AmmoPhos" Option: (1st Application): 6 (16-20-0); 1.5 (0-60-0); (2nd Application): 1.5 (46-0-0) Single Element Option: (1st Application): 1.75 (46-0-0); 6.75 (0-18-0); 1.5 (0-0-60); (2nd Application): 1.75 (46-0-0);	80	60	45	"Complete" Option: (1-time Application): 6.5 (14-14-14); 1.5 (46-0-0); 1.75 (0-18-0); "AmmoPhos" Option: (1-time Application): 6 (16-20-0); 1.5 (46-0-0); 1.5 (0-60-0); Single Element Option: (1-time Application): 3.5 (46-0-0); 6.75 (0-18-0); 1.5 (0-0-60);	36	1.00			
					"Complete" Option: (1st Application): 4.25 (14-14-14); 1.5 (46-0-0); 3.5 (0-18-0); (2nd Application): 2.75 (46-0-0); "AmmoPhos" Option: (1st Application): 6 (16-20-0); 0.5 (46-0-0); 1 (0-0-60); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 6.75 (0-18-0); 1 (0-0-60); (2nd Application): 2.75 (46-0-0);				"Complete" Option: (1-time Application): 4.25 (14-14-14); 4 (46-0-0); 3.5 (0-18-0); "AmmoPhos" Option: (1-time Application): 6 (16-20-0); 3.25 (46-0-0); 1 (0-0-60); Single Element Option: (1-time Application): 5.25 (46-0-0); 6.75 (0-18-0); 1 (0-0-60);				"Complete" Option: (1st Application): 4.25 (14-14-14); 0.5 (46-0-0); 3.5 (0-18-0); (2nd Application): 1.75 (46-0-0); "AmmoPhos" Option: (1-time Application): 6 (16-20-0); 1.5 (0-60-0); (2nd Application): 1.5 (46-0-0) Single Element Option: (1st Application): 1.75 (46-0-0); 6.75 (0-18-0); 1 (0-0-60); (2nd Application): 1.75 (46-0-0);				"Complete" Option: (1-time Application): 6.5 (14-14-14); 1.5 (46-0-0); 1 (0-0-60); Single Element Option: (1-time Application): 3.5 (46-0-0); 6.75 (0-18-0); 1 (0-0-60);					
					"Complete" Option: (1st Application): 4.25 (14-14-14); 1.5 (46-0-0); 3.5 (0-18-0); (2nd Application): 2.75 (46-0-0); "AmmoPhos" Option: (1st Application): 6 (16-20-0); 0.5 (46-0-0); 1 (0-0-60); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 6.75 (0-18-0); 1 (0-0-60); (2nd Application): 2.75 (46-0-0);				"Complete" Option: (1-time Application): 4.25 (14-14-14); 4 (46-0-0); 3.5 (0-18-0); "AmmoPhos" Option: (1-time Application): 6 (16-20-0); 3.25 (46-0-0); 1 (0-0-60); Single Element Option: (1-time Application): 5.25 (46-0-0); 6.75 (0-18-0); 1 (0-0-60);				"Complete" Option: (1st Application): 4.25 (14-14-14); 0.5 (46-0-0); 3.5 (0-18-0); (2nd Application): 1.75 (46-0-0); "AmmoPhos" Option: (1-time Application): 6 (16-20-0); 1.5 (0-60-0); (2nd Application): 1.5 (46-0-0) Single Element Option: (1st Application): 1.75 (46-0-0); 6.75 (0-18-0); 1 (0-0-60); (2nd Application): 1.75 (46-0-0);				"Complete" Option: (1-time Application): 6.5 (14-14-14); 1.5 (46-0-0); 1 (0-0-60); Single Element Option: (1-time Application): 3.5 (46-0-0); 6.75 (0-18-0); 1 (0-0-60);					
3	L-L-MH	120	60	30	"Complete" Option: (1st Application): 4.25 (14-14-14); 1.5 (46-0-0); 3.5 (0-18-0); (2nd Application): 2.75 (46-0-0); "AmmoPhos" Option: (1st Application): 6 (16-20-0); 0.5 (46-0-0); 1 (0-0-60); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 6.75 (0-18-0); 1 (0-0-60); (2nd Application): 2.75 (46-0-0);	120	60	30	"Complete" Option: (1-time Application): 4.25 (14-14-14); 4 (46-0-0); 3.5 (0-18-0); "AmmoPhos" Option: (1-time Application): 6 (16-20-0); 3.25 (46-0-0); 1 (0-0-60); Single Element Option: (1-time Application): 5.25 (46-0-0); 6.75 (0-18-0); 1 (0-0-60);	80	60	30	"Complete" Option: (1st Application): 4.25 (14-14-14); 0.5 (46-0-0); 3.5 (0-18-0); (2nd Application): 1.75 (46-0-0); "AmmoPhos" Option: (1-time Application): 6 (16-20-0); 1.5 (0-60-0); (2nd Application): 1.5 (46-0-0) Single Element Option: (1st Application): 1.75 (46-0-0); 6.75 (0-18-0); 1 (0-0-60); (2nd Application): 1.75 (46-0-0);	80	60	30	"Complete" Option: (1-time Application): 6.5 (14-14-14); 1.5 (46-0-0); 1 (0-0-60); Single Element Option: (1-time Application): 3.5 (46-0-0); 6.75 (0-18-0); 1 (0-0-60);	47	1.31			
					"Complete" Option: (1st Application): 4.25 (14-14-14); 1.5 (46-0-0); 3.5 (0-18-0); (2nd Application): 2.75 (46-0-0); "AmmoPhos" Option: (1st Application): 6 (16-20-0); 0.5 (46-0-0); 1 (0-0-60); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 6.75 (0-18-0); 1 (0-0-60); (2nd Application): 2.75 (46-0-0);				"Complete" Option: (1-time Application): 4.25 (14-14-14); 4 (46-0-0); 3.5 (0-18-0); "AmmoPhos" Option: (1-time Application): 6 (16-20-0); 3.25 (46-0-0); 1 (0-0-60); Single Element Option: (1-time Application): 5.25 (46-0-0); 6.75 (0-18-0); 1 (0-0-60);				"Complete" Option: (1st Application): 4.25 (14-14-14); 0.5 (46-0-0); 3.5 (0-18-0); (2nd Application): 1.75 (46-0-0); "AmmoPhos" Option: (1-time Application): 6 (16-20-0); 1.5 (0-60-0); (2nd Application): 1.5 (46-0-0) Single Element Option: (1st Application): 1.75 (46-0-0); 6.75 (0-18-0); 1 (0-0-60); (2nd Application): 1.75 (46-0-0);				"Complete" Option: (1-time Application): 6.5 (14-14-14); 1.5 (46-0-0); 1 (0-0-60); Single Element Option: (1-time Application): 3.5 (46-0-0); 6.75 (0-18-0); 1 (0-0-60);					
					"Complete" Option: (1st Application): 4.25 (14-14-14); 1.5 (46-0-0); 3.5 (0-18-0); (2nd Application): 2.75 (46-0-0); "AmmoPhos" Option: (1st Application): 6 (16-20-0); 0.5 (46-0-0); 1 (0-0-60); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 6.75 (0-18-0); 1 (0-0-60); (2nd Application): 2.75 (46-0-0);				"Complete" Option: (1-time Application): 4.25 (14-14-14); 4 (46-0-0); 3.5 (0-18-0); "AmmoPhos" Option: (1-time Application): 6 (16-20-0); 3.25 (46-0-0); 1 (0-0-60); Single Element Option: (1-time Application): 5.25 (46-0-0); 6.75 (0-18-0); 1 (0-0-60);				"Complete" Option: (1st Application): 4.25 (14-14-14); 0.5 (46-0-0); 3.5 (0-18-0); (2nd Application): 1.75 (46-0-0); "AmmoPhos" Option: (1-time Application): 6 (16-20-0); 1.5 (0-60-0); (2nd Application): 1.5 (46-0-0) Single Element Option: (1st Application): 1.75 (46-0-0); 6.75 (0-18-0); 1 (0-0-60); (2nd Application): 1.75 (46-0-0);				"Complete" Option: (1-time Application): 6.5 (14-14-14); 1.5 (46-0-0); 1 (0-0-60); Single Element Option: (1-time Application): 3.5 (46-0-0); 6.75 (0-18-0); 1 (0-0-60);					
4	L-L-H	120	60	7	"Complete" Option: (1st Application): 4.25 (14-14-14); 1.5 (46-0-0); 3.5 (0-18-0); (2nd Application): 2.75 (46-0-0); "AmmoPhos" Option: (1st Application): 6 (16-20-0); 0.5 (46-0-0); 1 (0-0-60); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 6.75 (0-18-0); 1 (0-0-60); (2nd Application): 2.75 (46-0-0);	120	60	7	"Complete" Option: (1-time Application): 4.25 (14-14-14); 4 (46-0-0); 3.5 (0-18-0); "AmmoPhos" Option: (1-time Application): 6 (16-20-0); 3.25 (46-0-0); 1 (0-0-60); Single Element Option: (1-time Application): 5.25 (46-0-0); 6.75 (0-18-0); 1 (0-0-60);	80	60	7	"Complete" Option: (1st Application): 4.25 (14-14-14); 0.5 (46-0-0); 3.5 (0-18-0); (2nd Application): 1.75 (46-0-0); "AmmoPhos" Option: (1-time Application): 6 (16-20-0); 1.5 (0-60-0); (2nd Application): 1.5 (46-0-0) Single Element Option: (1st Application): 1.75 (46-0-0); 6.75 (0-18-0); 1 (0-0-60); (2nd Application): 1.75 (46-0-0);	80	60	7	"Complete" Option: (1-time Application): 6.5 (14-14-14); 1.5 (46-0-0); 1 (0-0-60); Single Element Option: (1-time Application): 3.5 (46-0-0); 6.75 (0-18-0); 1 (0-0-60);	285	7.93			
					"Complete" Option: (1st Application): 4.25 (14-14-14); 1.5 (46-0-0); 3.5 (0-18-0); (2nd Application): 2.75 (46-0-0); "AmmoPhos" Option: (1st Application): 6 (16-20-0); 0.5 (46-0-0); 1 (0-0-60); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 6.75 (0-18-0); 1 (0-0-60); (2nd Application): 2.75 (46-0-0);				"Complete" Option: (1-time Application): 4.25 (14-14-14); 4 (46-0-0); 3.5 (0-18-0); "AmmoPhos" Option: (1-time Application): 6 (16-20-0); 3.25 (46-0-0); 1 (0-0-60); Single Element Option: (1-time Application): 5.25 (46-0-0); 6.75 (0-18-0); 1 (0-0-60);				"Complete" Option: (1st Application): 4.25 (14-14-14); 0.5 (46-0-0); 3.5 (0-18-0); (2nd Application): 1.75 (46-0-0); "AmmoPhos" Option: (1-time Application): 6 (16-20-0); 1.5 (0-60-0); (2nd Application): 1.5 (46-0-0) Single Element Option: (1st Application): 1.75 (46-0-0); 6.75 (0-18-0); 1 (0-0-60); (2nd Application): 1.75 (46-0-0);				"Complete" Option: (1-time Application): 6.5 (14-14-14); 1.5 (46-0-0); 1 (0-0-60); Single Element Option: (1-time Application): 3.5 (46-0-0); 6.75 (0-18-0); 1 (0-0-60);					
					"Complete" Option: (1st Application): 4.25 (14-14-14); 1.5 (46-0-0); 3.5 (0-18-0); (2nd Application): 2.75 (46-0-0); "AmmoPhos" Option: (1st Application): 6 (16-20-0); 0.5 (46-0-0); 1 (0-0-60); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 6.75 (0-18-0); 1 (0-0-60); (2nd Application): 2.75 (46-0-0);				"Complete" Option: (1-time Application): 4.25 (14-14-14); 4 (46-0-0); 3.5 (0-18-0); "AmmoPhos" Option: (1-time Application): 6 (16-20-0); 3.25 (46-0-0); 1 (0-0-60); Single Element Option: (1-time Application): 5.25 (46-0-0); 6.75 (0-18-0); 1 (0-0-60);				"Complete" Option: (1st Application): 4.25 (14-14-14); 0.5 (46-0-0); 3.5 (0-18-0); (2nd Application): 1.75 (46-0-0); "AmmoPhos" Option: (1-time Application): 6 (16-20-0); 1.5 (0-60-0); (2nd Application): 1.5 (46-0-0) Single Element Option: (1st Application): 1.75 (46-0-0); 6.75 (0-18-0); 1 (0-0-60); (2nd Application): 1.75 (46-0-0);				"Complete" Option: (1-time Application): 6.5 (14-14-14); 1.5 (46-0-0); 1 (0-0-60); Single Element Option: (1-time Application): 3.5 (46-0-0); 6.75 (0-18-0); 1 (0-0-60);					
6	L-ML-ML	120	40	45	"Complete" Option: (1st Application): 5.75 (14-14-14); 1 (46-0-0); 0.25 (0-0-60); (2nd Application): 2.75 (46-0-0); "AmmoPhos" Option: (1st Application): 6 (16-20-0); 1.25 (46-0-0); 1.5 (0-0-60); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 4.5 (0-18-0); 1.5 (0-0-60); (2nd Application): 2.75 (46-0-0);	120	40	45	"Complete" Option: (1-time Application): 5.75 (14-14-14); 3.5 (46-0-0); 0.25 (0-0-60); "AmmoPhos" Option: (1-time Application): 6 (16-20-0); 4 (46-0-0); 1.5 (0-0-60); Single Element Option: (1-time Application): 5.25 (46-0-0); 4.5 (0-18-0); 1.5 (0-0-60);	80	40	45	"Complete" Option: (1st Application): 5.75 (14-14-14); 0.25 (0-0-60); (2nd Application): 1.75 (46-0-0); "AmmoPhos" Option: (1st Application): 6 (16-20-0); 0.5 (46-0-0); 1.5 (0-0-60); (2nd Application): 1.75 (46-0-0) Single Element Option: (1st Application): 1.75 (46-0-0); 4.5 (0-18-0); 1.5 (0-0-60); (2nd Application): 1.75 (46-0-0);	80	40	45	"Complete" Option: (1-time Application): 5.75 (14-14-14); 1.75 (46-0-0); 0.25 (0-0-60); "AmmoPhos" Option: (1-time Application): 6 (16-20-0); 2 (46-0-0); 1.5 (0-0-60); Single Element Option: (1-time Application): 3.5 (46-0-0); 4.5 (0-18-0); 1.5 (0-0-60);	26	0.7			
					"Complete" Option: (1st Application): 5.75 (14-14-14); 1 (46-0-0); 0.25 (0-0-60); (2nd Application): 2.75 (46-0-0); "AmmoPhos" Option: (1st Application): 6 (16-20-0); 1.25 (46-0-0); 1.5 (0-0-60); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 4.5 (0-18-0); 1.5 (0-0-60); (2nd Application): 2.75 (46-0-0);				"Complete" Option: (1-time Application): 5.75 (14-14-14); 3.5 (46-0-0); 0.25 (0-0-60); "AmmoPhos" Option: (1-time Application): 6 (16-20-0); 4 (46-0-0); 1.5 (0-0-60); Single Element Option: (1-time Application): 5.25 (46-0-0); 4.5 (0-18-0); 1.5 (0-0-60);				"Complete" Option: (1st Application): 5.75 (14-14-14); 0.25 (0-0-60); (2nd Application): 1.75 (46-0-0); "AmmoPhos" Option: (1st Application): 6 (16-20-0); 0.5 (46-0-0); 1.5 (0-0-60); (2nd Application): 1.75 (46-0-0) Single Element Option: (1st Application): 1.75 (46-0-0); 4.5 (0-18-0); 1.5 (0-0-60); (2nd Application): 1.75 (46-0-0);				"Complete" Option: (1-time Application): 5.75 (14-14-14); 1.75 (46-0-0); 0.25 (0-0-60); "AmmoPhos" Option: (1-time Application): 6 (16-20-0); 2 (46-0-0); 1.5 (0-0-60); Single Element Option: (1-time Application): 3.5 (46-0-0); 4.5 (0-18-0); 1.5 (0-0-60);					
					"Complete" Option: (1st Application): 5.75 (14-14-14); 1 (46-0-0); 0.25 (0-0-60); (2nd Application): 2.75 (46-0-0); "AmmoPhos" Option: (1st Application): 6 (16-20-0); 1.25 (46-0-0); 1.5 (0-0-60); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 4.5 (0-18-0); 1.5 (0-0-60); (2nd Application): 2.75 (46-0-0);				"Complete" Option: (1-time Application): 5.75 (14-14-14); 3.5 (46-0-0); 0.25 (0-0-60); "AmmoPhos" Option: (1-time Application): 6 (16-20-0); 4 (46-0-0); 1.5 (0-0-60); Single Element Option: (1-time Application): 5.25 (46-0-0); 4.5 (0-18-0); 1.5 (0-0-60);				"Complete" Option: (1st Application): 5.75 (14-14-14); 0.25 (0-0-60); (2nd Application): 1.75 (46-0-0); "AmmoPhos" Option: (1st Application): 6 (16-20-0); 0.5 (46-0-0); 1.5 (0-0-60); (2nd Application): 1.75 (46-0-0) Single Element Option: (1st Application): 1.75 (46-0-0); 4.5 (0-18-0); 1.5 (0-0-60); (2nd Application): 1.75 (46-0-0);				"Complete" Option: (1-time Application): 5.75 (14-14-14); 1.75 (46-0-0); 0.25 (0-0-60); "AmmoPhos" Option: (1-time Application): 6 (16-20-0); 2 (46-0-0); 1.5 (0-0-60); Single Element Option: (1-time Application): 3.5 (46-0-0); 4.5 (0-18-0); 1.5 (0-0-60);					
8	L-ML-H	120	40	7	"Complete" Option: (1st Application): 1 (14-14-14); 2.5 (46-0-0); 3.75 (0-18-0); (2nd Application): 2.75 (46-0-0); "AmmoPhos" Option: (1st Application): 4 (16-20-0); 1.25 (46-0-0); 0.25 (0-0-60); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 4.5 (0-18-0); 0.25 (0-0-60); (2nd Application): 2.75 (46-0-0);	120	40	7	"Complete" Option: (1-time Application): 1 (14-14-14); 5 (46-0-0); 3.75 (0-18-0); "AmmoPhos" Option: (1-time Application): 4 (16-20-0); 4 (46-0-0); 0.25 (0-0-60); Single Element Option: (1-time Application): 5.25 (46-0-0); 4.5 (0-18-0); 0.25 (0-0-60);	80	40	7	"Complete" Option: (1st Application): 1 (14-14-14); 1.5 (46-0-0); 3.75 (0-18-0); (2nd Application): 1.75 (46-0-0); "AmmoPhos" Option: (1st Application): 4 (16-20-0); 0.5 (46-0-0); 0.25 (0-0-60); (2nd Application): 1.75 (46-0-0) Single Element Option: (1st Application): 1.75 (46-0-0); 4.5 (0-18-0); 0.25 (0-0-60); (2nd Application): 1.75 (46-0-0);	80	40	7	"Complete" Option: (1-time Application): 1 (14-14-14); 3.25 (46-0-0); 3.75 (0-18-0); "AmmoPhos" Option: (1-time Application): 4 (16-20-0); 2 (46-0-0); 0.25 (0-0-60); Single Element Option: (1-time Application): 3.5 (46-0-0); 4.5 (0-18-0); 0.25 (0-0-60);	49	1.36			
					"Complete" Option: (1st Application): 1 (14-14-14); 2.5 (46-0-0); 3.75 (0-18-0); (2nd Application): 2.75 (46-0-0); "AmmoPhos" Option: (1st Application): 4 (16-20-0); 1.25 (46-0-0); 0.25 (0-0-60); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 4.5 (0-18-0); 0.25 (0-0-60); (2nd Application): 2.75 (46-0-0);				"Complete" Option: (1-time Application): 1 (14-14-14); 5 (46-0-0); 3.75 (0-18-0); "AmmoPhos" Option: (1-time Application): 4 (16-20-0); 4 (46-0-0); 0.25 (0-0-60); Single Element Option: (1-time Application): 5.25 (46-0-0); 4.5 (0-18-0); 0.25 (0-0-60);				"Complete" Option: (1st Application): 1 (14-14-14); 1.5 (46-0-0); 3.75 (0-18-0); (2nd Application): 1.75 (46-0-0); "AmmoPhos" Option: (1st Application): 4 (16-20-0); 0.5 (46-0-0); 0.25 (0-0-60); (2nd Application): 1.75 (46-0-0) Single Element Option: (1st Application): 1.75 (46-0-0); 4.5 (0-18-0); 0.25 (0-0-60); (2nd Application): 1.75 (46-0-0);				"Complete" Option: (1-time Application): 1 (14-14-14); 3.25 (46-0-0); 3.75 (0-18-0); "AmmoPhos" Option: (1-time Application): 4 (16-20-0); 2 (46-0-0); 0.25 (0-0-60); Single Element Option: (1-time Application): 3.5 (46-0-0); 4.5 (0-18-0); 0.25 (0-0-60);					
					"Complete" Option: (1st Application): 1 (14-14-14); 2.5 (46-0-0); 3.75 (0-18-0); (2nd Application): 2.75 (46-0-0); "AmmoPhos" Option: (1st Application): 4 (16-20-0); 1.25 (46-0-0); 0.25 (0-0-60); (2nd Application): 2.75 (46-0-0); Single Element Option: (1st Application): 2.75 (46-0-0); 4.5 (0-18-0); 0.25 (0-0-60); (2nd Application): 2.75 (46-0-0);				"Complete" Option: (1-time Application): 1 (14-14-14); 5 (46-0-0); 3.75 (0-18-0); "AmmoPhos" Option: (1-time Application): 4 (16-20-0); 4 (46-0-0); 0.25 (0-0-60); Single Element Option: (1-time Application): 5.25 (46-0-0); 4.5 (0-18-0); 0.25 (0-0-60);				"Complete" Option: (1st Application): 1 (14-14-14); 1.5 (46-0-0); 3.75 (0-18-0); (2nd Application): 1.75 (46-0-0); "AmmoPhos" Option: (1st Application): 4 (16-20-0); 0.5 (46-0-0); 0.25 (0-0-60); (2nd Application): 1.75 (46-0-0) Single Element Option: (1st Application): 1.75 (46-0-0); 4.5 (0-18-0); 0.25 (0-0-60); (2nd Application): 1.75 (46-0-0);				"Complete" Option: (1-time Application): 1 (14-14-14); 3.25 (46-0-0); 3.75 (0-18-0); "AmmoPhos" Option: (1-time Application): 4 (16-20-0); 2 (46-0-0); 0.25 (0-0-60); Single Element Option: (1-time Application): 3.5 (46-0-0); 4.5 (0-18-0); 0.25 (0-0-60);					
14	L-H-ML	120	0	45	"Complete" Option: (1st Application): 2.75 (46-0-0); 1.5 (0-0-60); (2nd Application): 2.75 (46-0-0);	120	0	45	"Complete" Option: (1-time Application): 5.25 (46-0-0); 1.5 (0-0-60);	80	7	45	"Complete" Option: (1st Application): 1 (14-14-14); 1.5 (46-0-0); 1.5 (0-0-60); (2nd Application): 1.75 (46-0-0); "AmmoPhos" Option: (1st Application): 0.75 (16-20-0); 1.5 (46-0-0); 1.5 (0-0-60); (2nd Application): 1.75 (46-0-0) Single Element Option: (1st Application): 1.75 (46-0-0); 0.7									